

LINOVISION

4G LTE Combo 5-in-1 Antenna
ANT-4GCombo5
Quick Guide (V1.1/2026-6-18)



Quick Guide

Package Contents




ANT-4GCombo5




Quick Guide

Interface

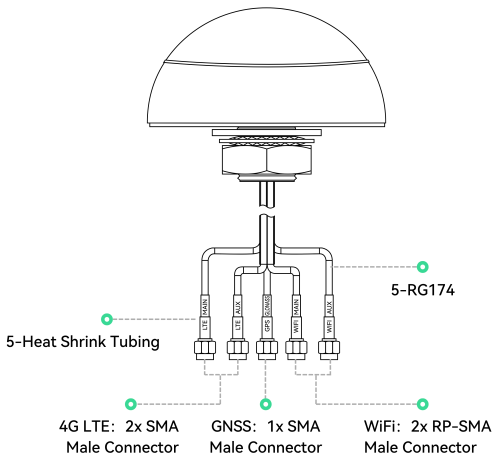


Installation


1




2



3



4



Specifications

Model	ANT-4GCombo5	
GPS&GLONASS Antenna	Frequency Range	1575.42~1610MHz
	Polarization	RHCP
	Impedance	50Ω
	Gain	28±2dB
	Noise Figure	≤1.5dB
	Supply Voltage	3-5V DC
	Current Consumption	<15mA
	V.S.W.R	<2.0
LTE Antenna MIMO	Frequency Range	698-960MHz/1710-2690MHz
	V.S.W.R	<3.0
	Polarization	Linear
	Gain	3dBi
	Impedance	50Ω
WIFI Antenna MIMO	Frequency Range	2400~2483.5MHz/4900~5825 MHz
	V.S.W.R	<2.5
	Polarization	Linear
	Gain	2dBi
	Impedance	50Ω
Mechanical	Cable	RG174
	Connector	SMA or others
	Radome Material	ABS
	Mounting Method	Screw
Environmental	Operating Temperature	-40°C to +85°C (-40°F to 185°F)
	Relative Humidity	Up to 95%
	Ingress Protection	IP67 (exclude cable outlet)
	Vibration	10 to 55Hz with 1.5mm amplitude 2hours
	Environmentally Friendly	ROHS Compliant