

LINOVISION

Outdoor 3-in-1 Combo Antenna & Router Enclosure


ANT-COMBO3P

Quick Guide (V1.0/2026-7-21)



Quick Guide

Package Contents



ANT-COMBO3P



Screw Bag




Hoop




Quick Guide

Interface

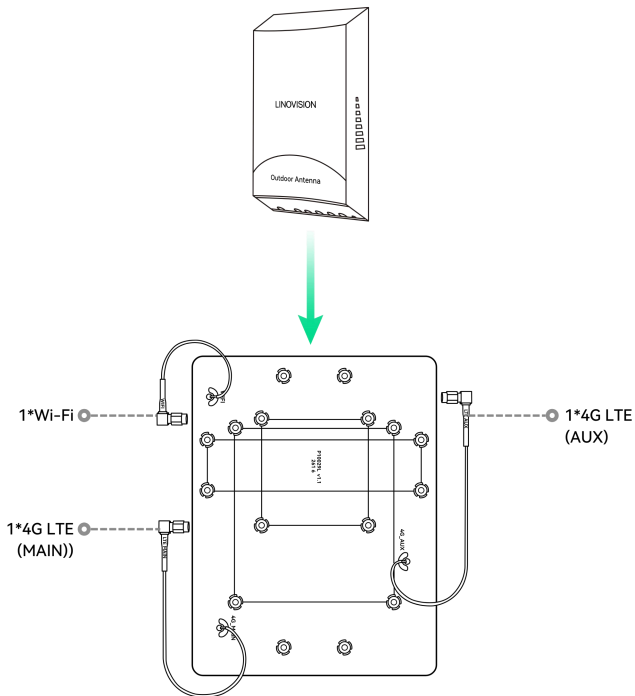


Installation

1.Remove Rear Screws & Release Bottom Cover

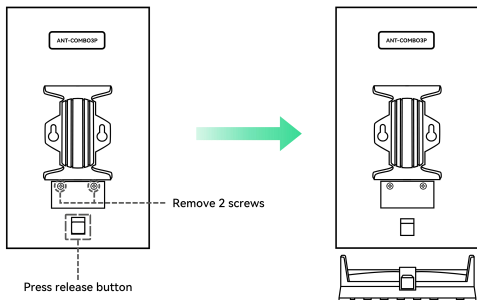


2.Remove the Antenna Board

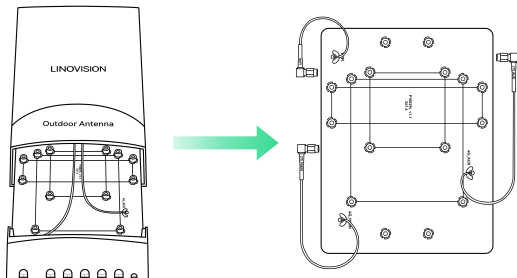


Installation


3.Install the Router



LINOVISION
IOT-R32W




TELTONIKA
RUT241



InHand
IR302


4.Install Router Assembly into Enclosure




Install From
Bottom

Installation

5.Mount Type



Pole-Mounting

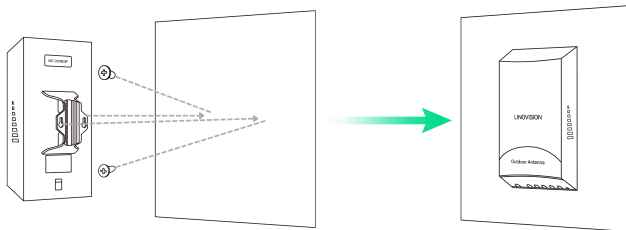

Wall Mounting

Specifications

Model	ANT-COMBO3P	
LTE Antenna MAIN	Frequency Range	698~960MHz/1710~2690MHz
	V.S.W.R	< 3.0
	Polarization	Linear
	Gain	2.5dBi (Zenith)
	Impedance	50Ω
LTE Antenna AUX	Frequency Range	698~960MHz/1710~2690MHz
	V.S.W.R	< 3.0
	Polarization	Linear
	Gain	2.0dBi (Zenith)
	Impedance	50Ω
WIFI Antenna	Frequency Range	2400~2483.5MHz/4900~5825 MHz
	V.S.W.R	< 2.0
	Polarization	Linear
	Gain	3.0dBi (Zenith)
	Impedance	50Ω
Mechanical	Cable	RG178
	Connector	SMA or others
	Material	FR-4
Environmental	Operating Temperature	-40°C ~ +85°C (-40°F ~ +185°F)
	Relative Humidity	Up to 95%
	Vibration	10 to 55Hz with 1.5mm amplitude 2hours
	Environmentally Friendly	ROHS Compliant