

LINOVISION

30W High-Efficiency PoE LED Driver
POE-Driver30
Quick Guide (V1.0/2026-4-14)



Quick Guide

Package Contents



POE-Driver30




Terminal




Quick Guide

Connection Diagram

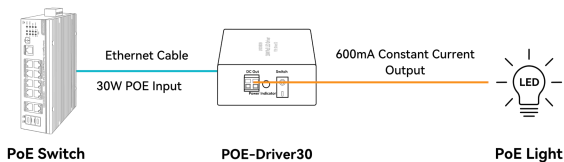


Interface

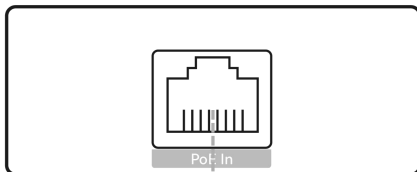

802.3af/at30W Input

Front View

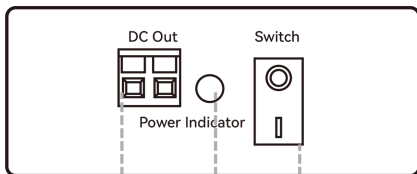

600mA Constant Current Output

Back View

Specifications

Power	
Supply Protocol	IEEE 802.3 af/at MAX. 30W
Supply Mode	Mode A & Mode B
Output Voltage Ranges	3~54V
Output Current	Constant 600mA
Interface	
PoE In	1* RJ45
DC Output	1* 2P Terminal
Mechanical Specs	
Dimensions (W*H*D)	60 x 25 x 100 mm (2.36 x 0.984 x 3.93 in)
Weight	82g (0.18 lb)
Protection Rating	IP40
Housing	Metal
Cooling	Fanless
Ambient Environment	
Storage Temperature	-40°C to +85°C (-40°F to +185°F)
Operating Temperature	-40°C to +55°C (-40°F to +131°F)
Ambient Humidity	0% to 95% (non-condensing) at 25°C/77°F
Ethernet Isolation	1.5 kV RMS
Indicator	
Power	1 × Green LED