

LINOVISION

PoE Injector for Starlink
POE-INSTARLINK
Quick Guide (V2.0/2026-5-14)



Quick Guide

Package Contents



POE-INSTARLINK




Terminal




Quick Guide

Connection Diagram

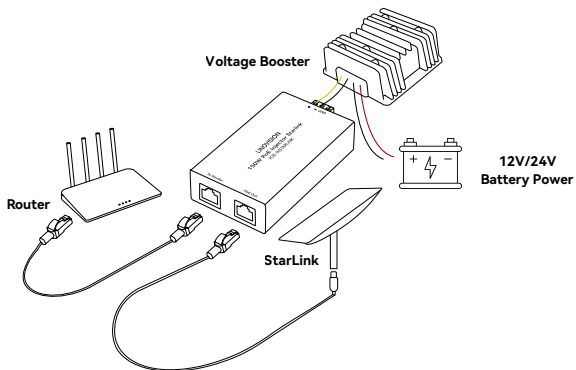

Connection Diagram

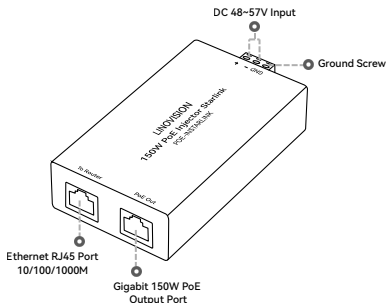

Data Sheet

Mechanical Specs	
Dimensions (W*H*D)	60 x 25 x 100 mm (2.36 x 0.984 x 3.94 in)
Weight	0.117 kg (0.258 lb)
Enclosure	Aluminum
Protection Rating	IP40
Interfaces	
Power Supply	DC 48-57 V, 3A
Ethernet Port	2 * 10/100/1000Base-T RJ45 Ports
Environment	
Operating Temperature	-20°C to 60°C (-4°F to 140°F)
Storage Temperature	-40°C to 70°C (-40°F to 158°F)
Operating Humidity	10% to 90% non-condensing
Surge Protection	Differential mode ± 6 KV, Class A
ESD Protection	Contact ± 8 KV, Air ± 15 KV, Class A