


LINOVISION

Mini PoE Splitter with SFP Port
POE-SP1224F
Quick Guide (V1.0/2025-10-14)




Quick Guide

Package Contents



POE-SP1224F





DIN-Rail Mounting
Accessory




Quick Guide

Interface

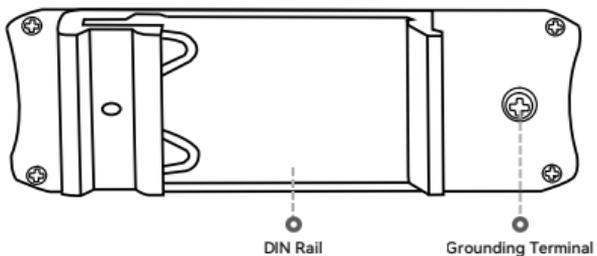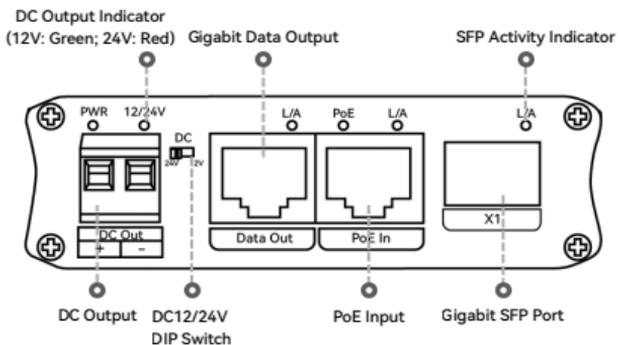


Installation

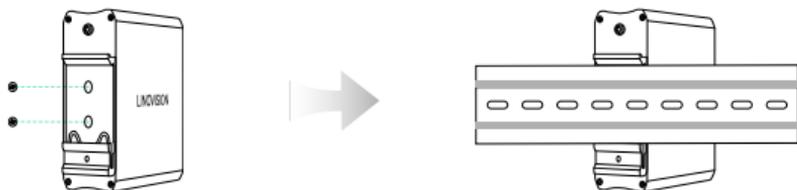

DIN-Rail Mounting Diagram

Connection Diagram

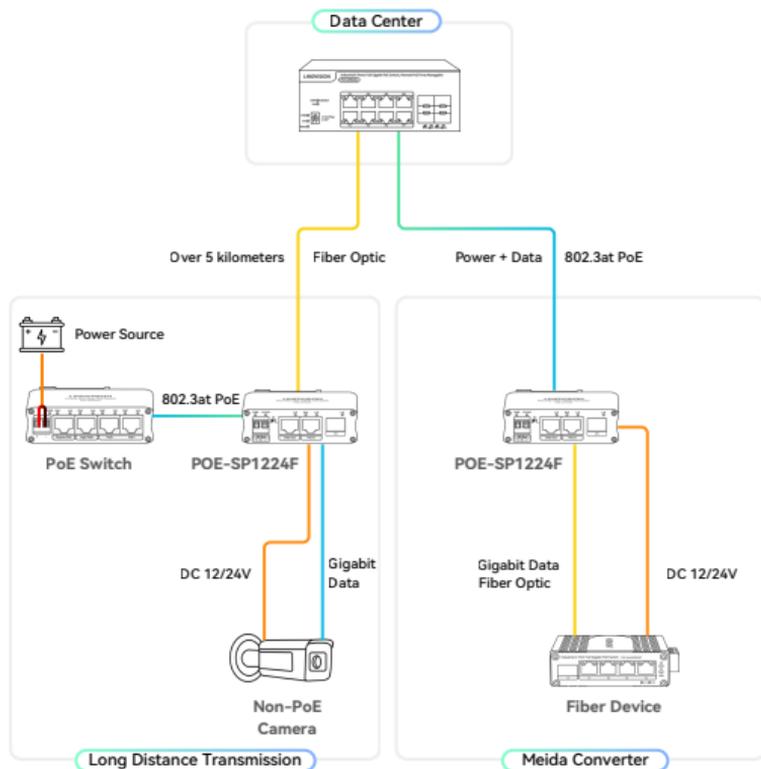

Specifications

Mechanical Specs	
Dimensions (W*H*D)	82.7 * 63 * 25.8 mm (3.26 * 2.48 * 1.02 in)
Weight	0.128 kg (0.282 lb)
Material	Aluminum
Installation	DIN-Rail
Interfaces	
PoE Input	Ethernet Port: 1 * 10/100/1000Base-T RJ45 PoE Standard: IEEE 802.3af/at Power Supply: Mode A & Mode B
Data Output	Ethernet Port: 1 * 10/100/1000Base-T RJ45 SFP Port: 1 * 100/1000Base-X SFP slot
DC Output	12V/24V switchable, max 25W
DC Output Connector	Terminal Block Connector
Grounding	Grounding
LED & DIP Switch	
PoE	Power over Ethernet
L/A	Link/Activity
PWR	Power
DC DIP Switch	Toggle switch for selecting 12V/24V DC output
Environment	
Operating Temperature	-40°C to 75°C (-40°F to 167°F)
Storage Temperature	-40°C to 85°C (-40°F to 158°F)
Humidity	0% to 95% non-condensing
Surge Protection	1500 V
Electrostatic Standard	HBM ±2000 V, CDM ±750 V