

LINOVISION

Full Gigabit 4 Ports IEEE 802.3bt PoE
Switch

POE-SW304G-4BT

Quick Guide (V1.0/2026-2-11)



Quick Guide

Package Contents



POE-SW304G-4BT



Power Adapter




Wall Mounting
Accessory




Quick Guide

Connection Diagram

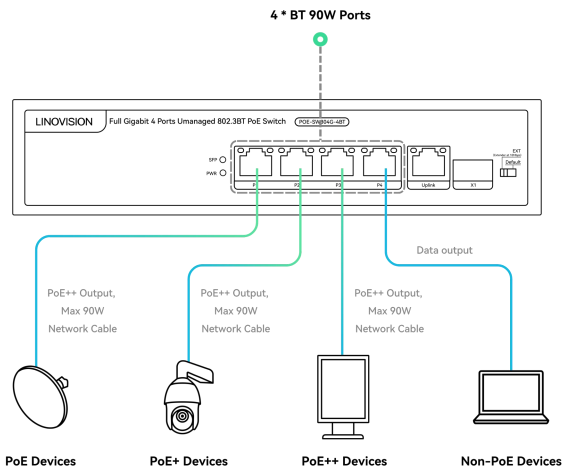


Interface



Front View

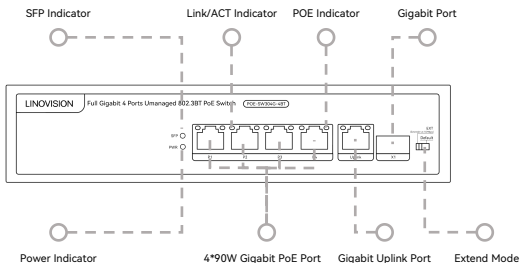

Back View

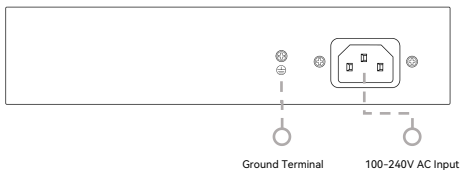

Installation



Wall-mounting

Specifications

Mechanical	
Dimensions (W*D*H)	7.95×5.51×1.75" (202×140×44.5mm)
Input Power Supply	100 to 240V AC, 50/60Hz
Weight	2.42lb (1.1kg)
Material	Aluminum
Installation	Desktop Installation
Interface	
Connector	4 * 10/100/1000Mbps PoE RJ45 Ports 1 * 10/100/1000Mbps RJ45 Port 1 * 1000Mbps SFP Slot
Ethernet	
Processing Type	Store and Forward
Packet forwarding rate	8.93Mpps
Switching Capacity	12Gbps
MAC Address Table	8k
PoE	
PoE Standard	IEEE 802.3af/at/bt
PoE Power Supply Mode	4 Pairs: 12/45 (+), 36/78 (-)
PoE Power Output	Max.90W(Single Port)
PoE Total Budget	96W
Environmental	
Operating Temperature	-4°F to 131°F(-20°C to 55°C)
Storage Temperature	-4°F to 167°F(-20°C to 75°C)
Operating Humidity	5% to 95% non-condensing
Storage Humidity	5% to 95% non-condensing
ESD Protection	6KV