


## POE-SWR410UR

8 Ports UltraReach PoE Switch With Remotely Cloud Management

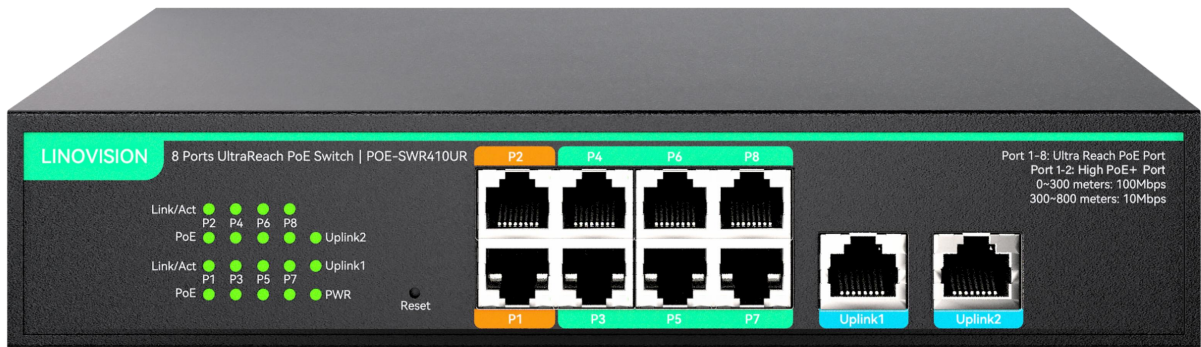

### Outstanding Features

- **8 Ports UltraReach PoE Switch:** Provides 8 10/100Mbps IEEE802.3af/at compliant PoE ports and 2 Gigabit ethernet uplinks.
- **2600ft UltraReach PoE:** All PoE ports adopts Linovision proprietary UltraReach PoE technology and extend PoE & data up to 2,600ft or 800 meters. It offers great flexibility for cabling. (POE-EXT3001LP (ASIN: B0CTH7WNPk) should be connected at the remote side and is sold separately.)
- **High PoE+ Output:** The first two ports provide 45W High PoE+ output, suitable for big PTZ cameras or multi-imager cameras.
- **Remotely Cloud Managed:** via WEB GUI or RemoteMonit CLOUD. It supports VLAN, QOS and PoE port management, including PoE On/Off control, Power budget, priority, etc.
- **Package:** includes built-in 130W power supply.
- **Important Notification:** POE-EXT3001LP works with standard PoE device only. Non-PoE device can not be used in UltraReach transmission.

## Specification

| <b>Mechanical</b>         |   |
|---------------------------|---|
| Material                  | Metal   |
| Weight                    | 2.64lb (1.2kg)  |
| Dimension                 | 8.66 × 6.30 × 1.73 in (220 × 160 × 44 mm)   |
| Storage Temperature       | -40°F to 158°F (-40°C to +70°C)   |
| Operating Temperature     | 32°F to 104°F (0°C to +40°C)  |
| Operating Humidity        | 10% ~ 90% non-condensing  |
| Storage Humidity          | 5% ~ 90% non-condensing   |
| <b>Interfaces</b>         |   |
| Input Power Supply        | AC: 100-240V 50/60Hz  |
| Network                   | 8 * 10/100Mbps RJ45 Ports / 2 * 10/100/1000Mbps RJ45 Ports  |
| Indicator                 | PWR(Green), LNK/ACT(Green), PoE(Orange)   |
| Standard                  | IEEE802.3,IEEE802.3i,IEEE802.3u,IEEE802.3x,IEEE802.1q,IEEE802.1p,IEEE802.3af, IEEE802.3at   |
| <b>Ethernet</b>           |   |
| PoE Output Ports          | Port 1-2: High PoE+, IEEE 802.3af/at, 45W(Max), Mode A(Pins 1/2[+], 3/6[-])<br>Port 3-8: PoE+, IEEE 802.3af/at, Mode A(Pins 1/2[+], 3/6[-]) |
| Power Supply              | 130W  |
| PoE Power Budget          | 120W  |
| <b>Switching Features</b> |   |
| MAC Address Table         | 8K  |
| Packet Buffer             | 4Mbits  |
| Jumbo Frame               | 9216Byte  |
| Switching Capacity        | 5.6Gbps   |
| Packet Forward Speed      | 4.17Mpps  |
| <b>Environment</b>        |   |
| Surge Protection          | Differential mode ±2KV,Common mode ±4KV   |

*\*Disclaimer: Technical specifications may subject to change without prior notice*

## Specification

|                        |                        |
|------------------------|------------------------|
| Electrostatic Standard | Contact ±6KV, Air ±8KV |
| MTBF                   | >50000 hours           |

## Dimension




Weight: 1.2kg(2.64lb)

*\*Disclaimer: Technical specifications may subject to change without prior notice*

## Interface

### Front View

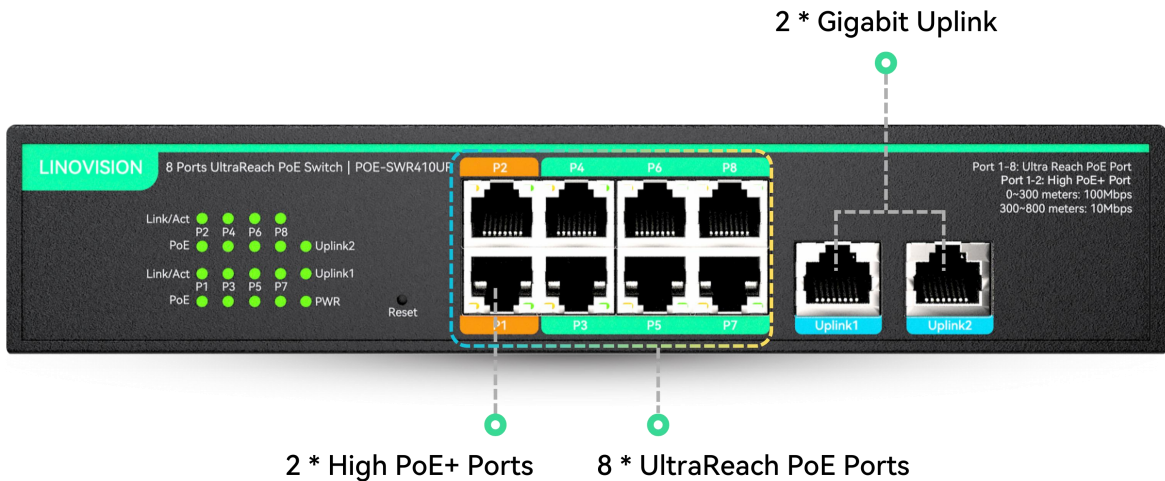


Total PoE Budget 120W

### Back View








*\*Disclaimer: Technical specifications may subject to change without prior notice*

## Connection Diagram

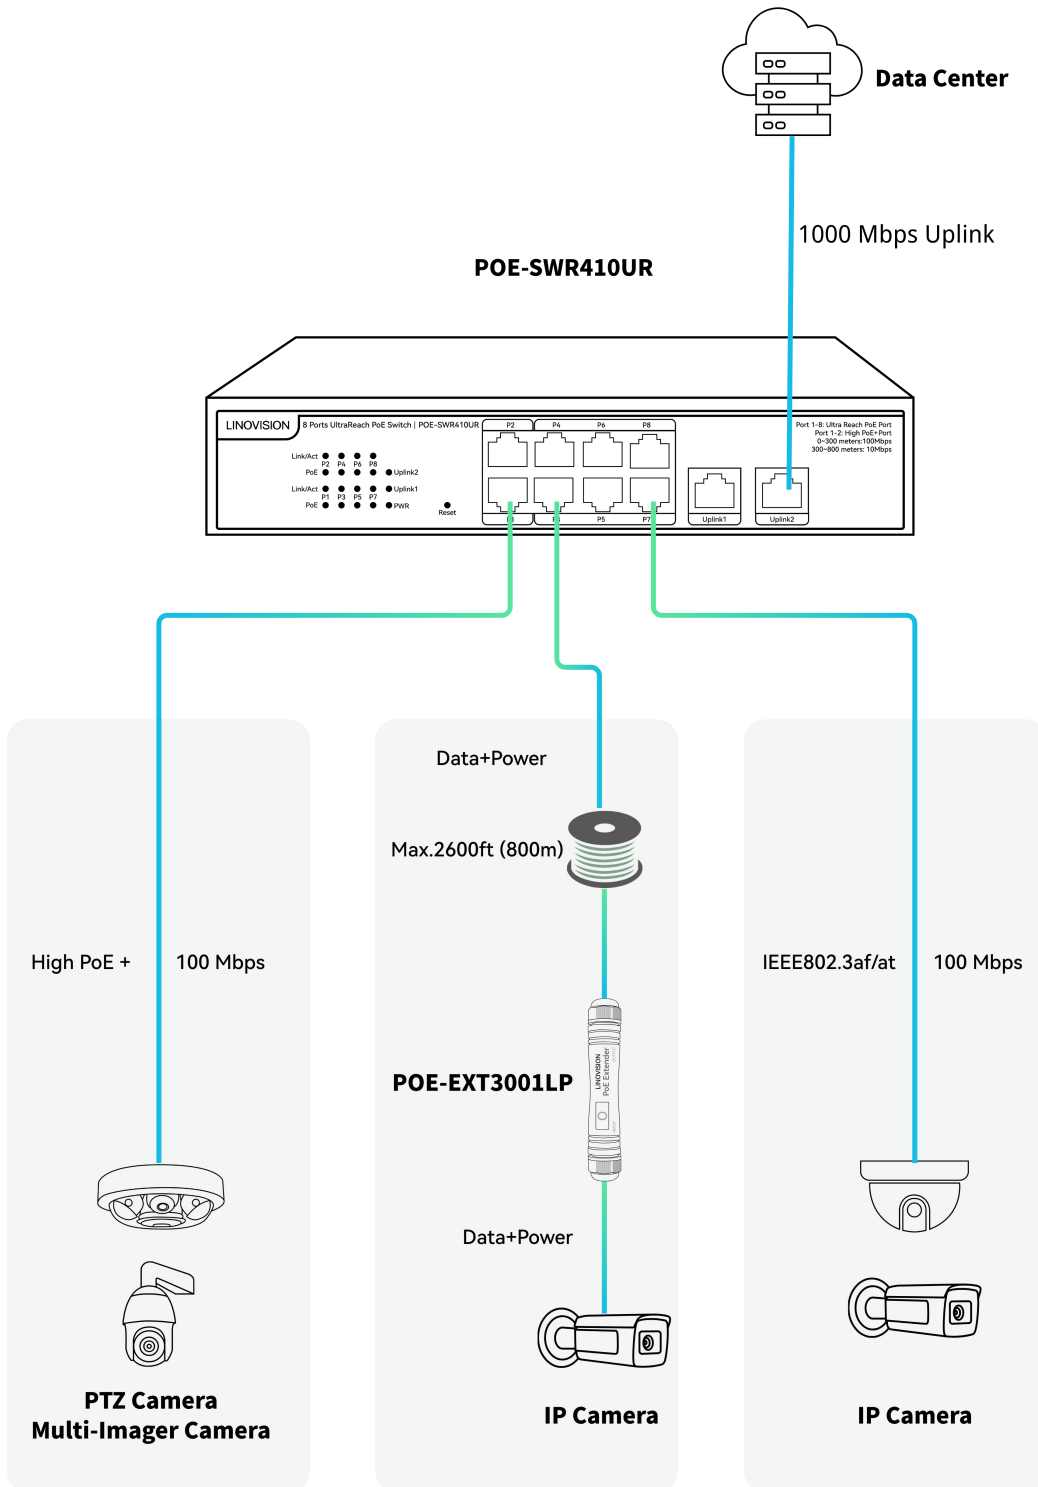

*\*Disclaimer: Technical specifications may subject to change without prior notice*

## Installation

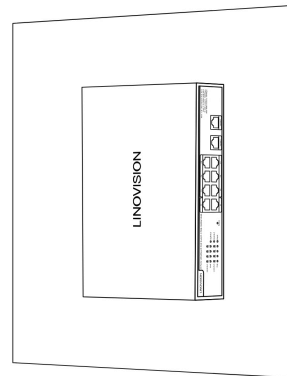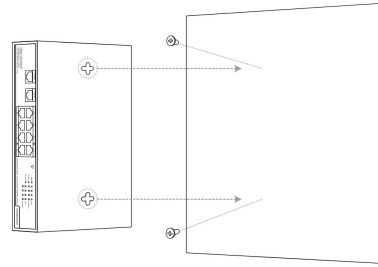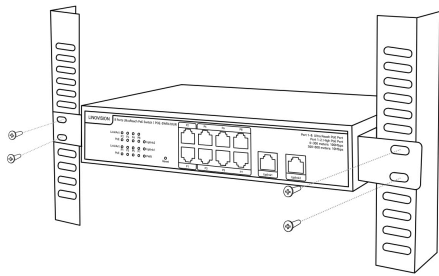

### Cabinet Installation & Wall Mounting

*\*Disclaimer: Technical specifications may subject to change without prior notice*


## Package



POE-SWR410UR



Power Adapter



Rack Mount Accessory



User Manual