

ANT-COMBO3P

Outdoor 3-in-1 Combo Antenna & Router Enclosure for IOT-R32W, RUT241 & IR302



Outstanding Features

- **Outdoor 3-in-1 Combo Antenna:** Integrated 2 * LTE and 1 * WiFi antennas, global frequency bands and enhanced signal.
- **Router Enclosure:** Fits cellular routers like Teltonika RUT241, Inhand IR302, Linovision IOT-R32W.
- **Wall Mount & Pole Mount:** Accessories included (Pole clamp 3.94 inches or 10cm).
- **Application:** Great to bundle with cellular routers and provide cellular connectivity in outdoor sites, such as parking lots, off-grid camera poles, solar camera trailers.


Specification

Model	ANT-COMBO3P	
LTEAntenna MAIN	Frequency Range	698~960MHz/1710~2690MHz
	V.S.W.R	< 3.0
	Polarization	Linear
	Gain	2.5dBi (Zenith)
	Impedance	50Ω
LTE Antenna AUX	Frequency Range	698~960MHz/1710~2690MHz
	V.S.W.R	< 3.0
	Polarization	Linear
	Gain	2.0dBi (Zenith)
	Impedance	50Ω
WIFI Antenna	Frequency Range	2400~2483.5MHz/4900~5825MHz
	V.S.W.R	< 2.0
	Polarization	Linear
	Gain	3.0dBi (Zenith)
	Impedance	50Ω
Mechanical	Cable	RG178
	Connector	SMA or others
	Material	FR-4
Environmental	Operating Temperature	-40°C ~ +85°C (-40°F ~ +185°F)
	Relative Humidity	Up to 95%
	Vibration	10 to 55Hz with 1.5mm amplitude 2hours
	Environmentally Friendly	ROHS Compliant

**Disclaimer: Technical specifications may subject to change without prior notice*


LINOVISION

Dimension

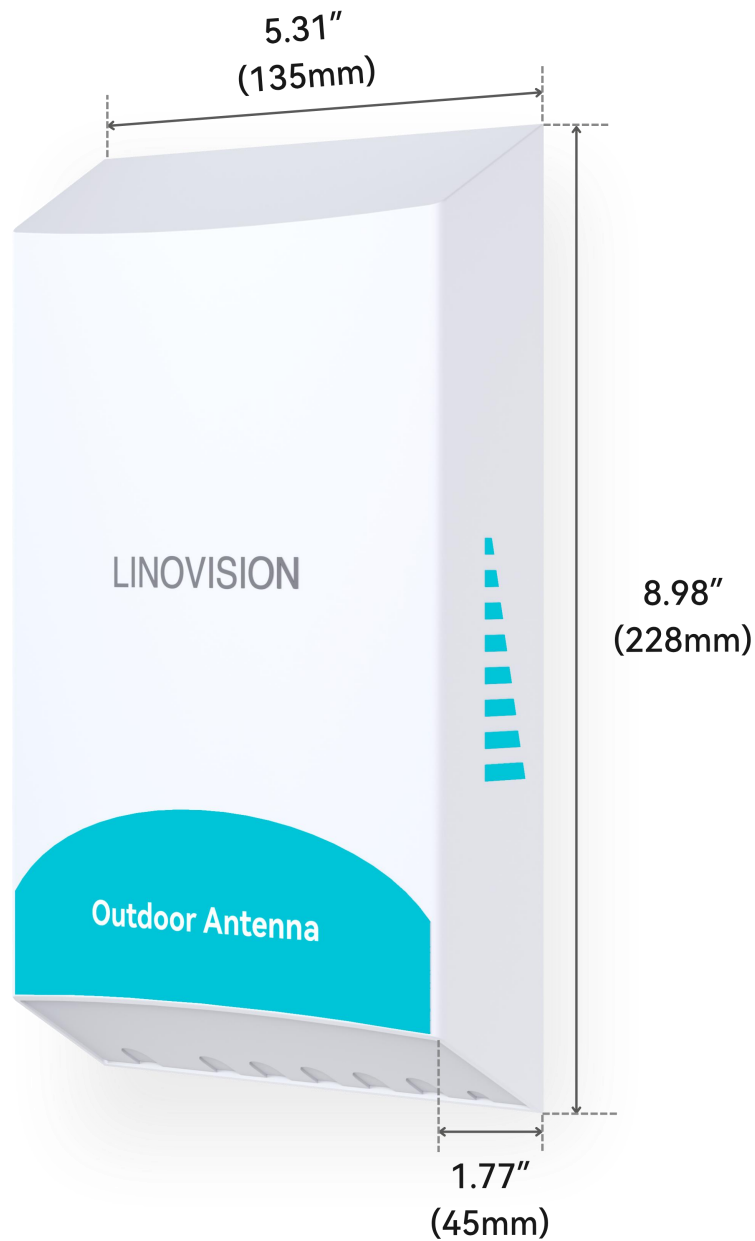


Weight: 400g (0.882lb)

Built-in 3-in-1 Antenna

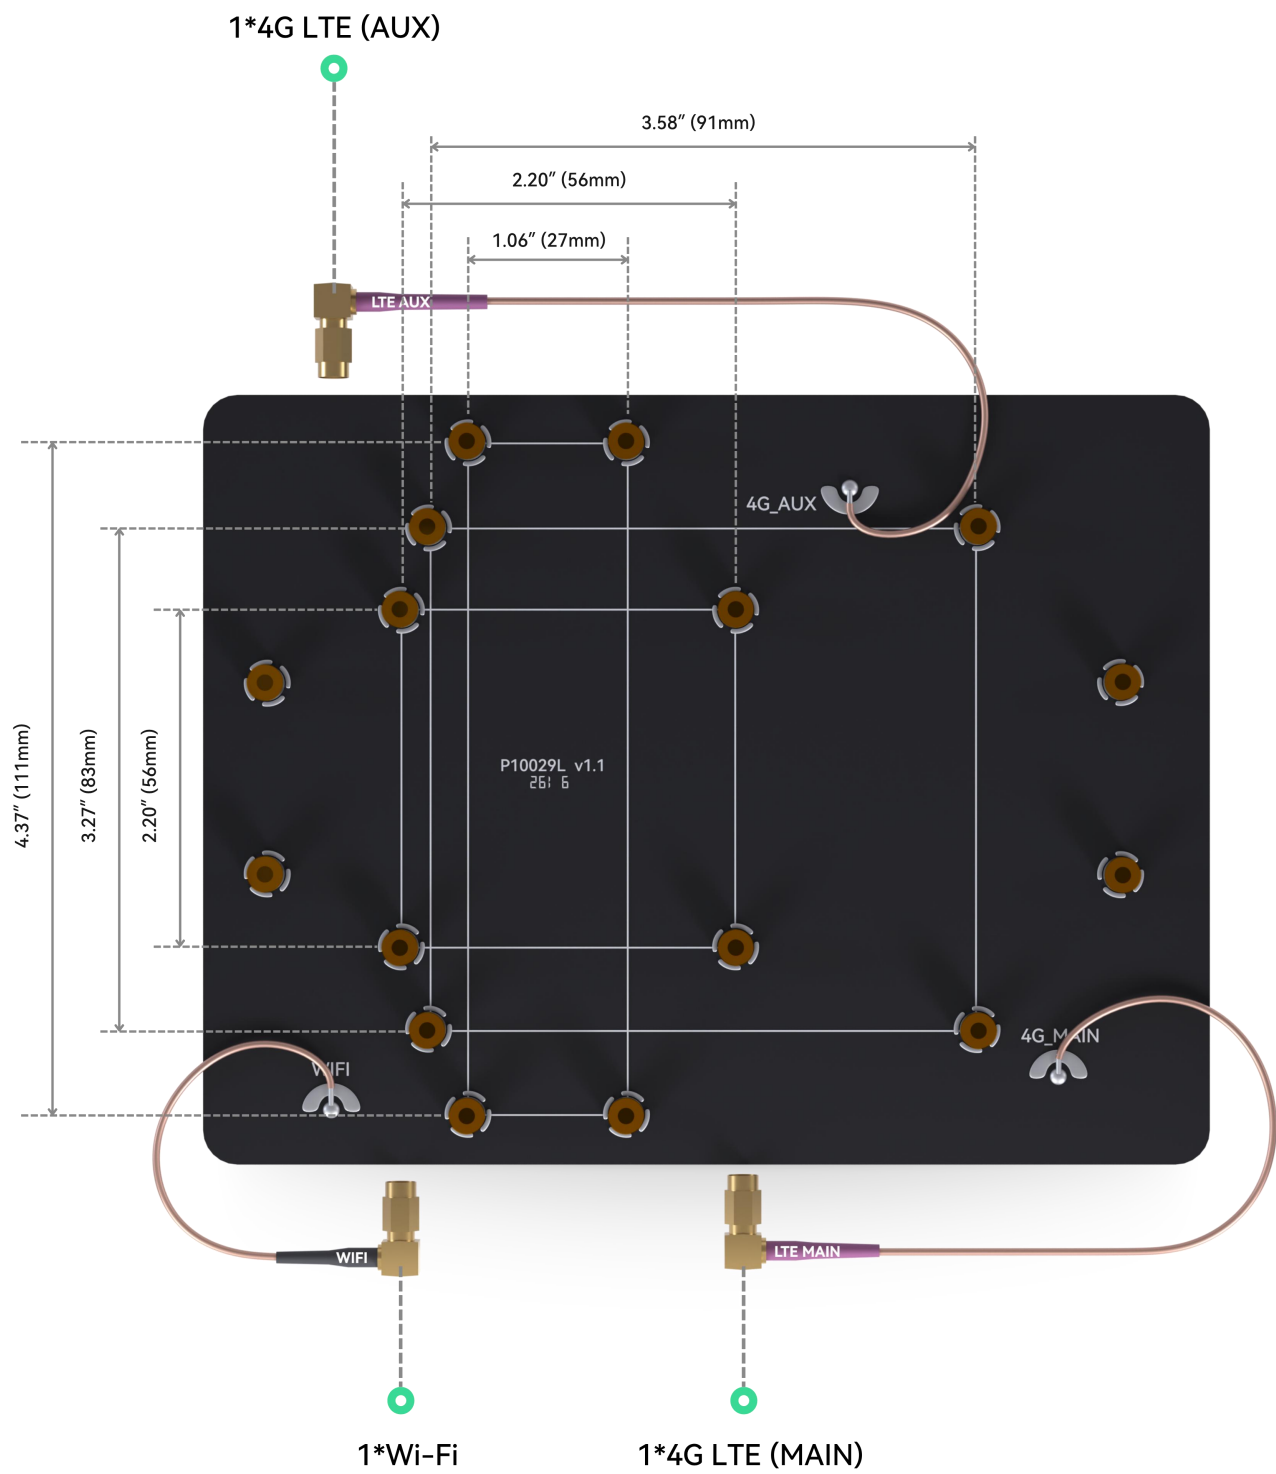


Interface

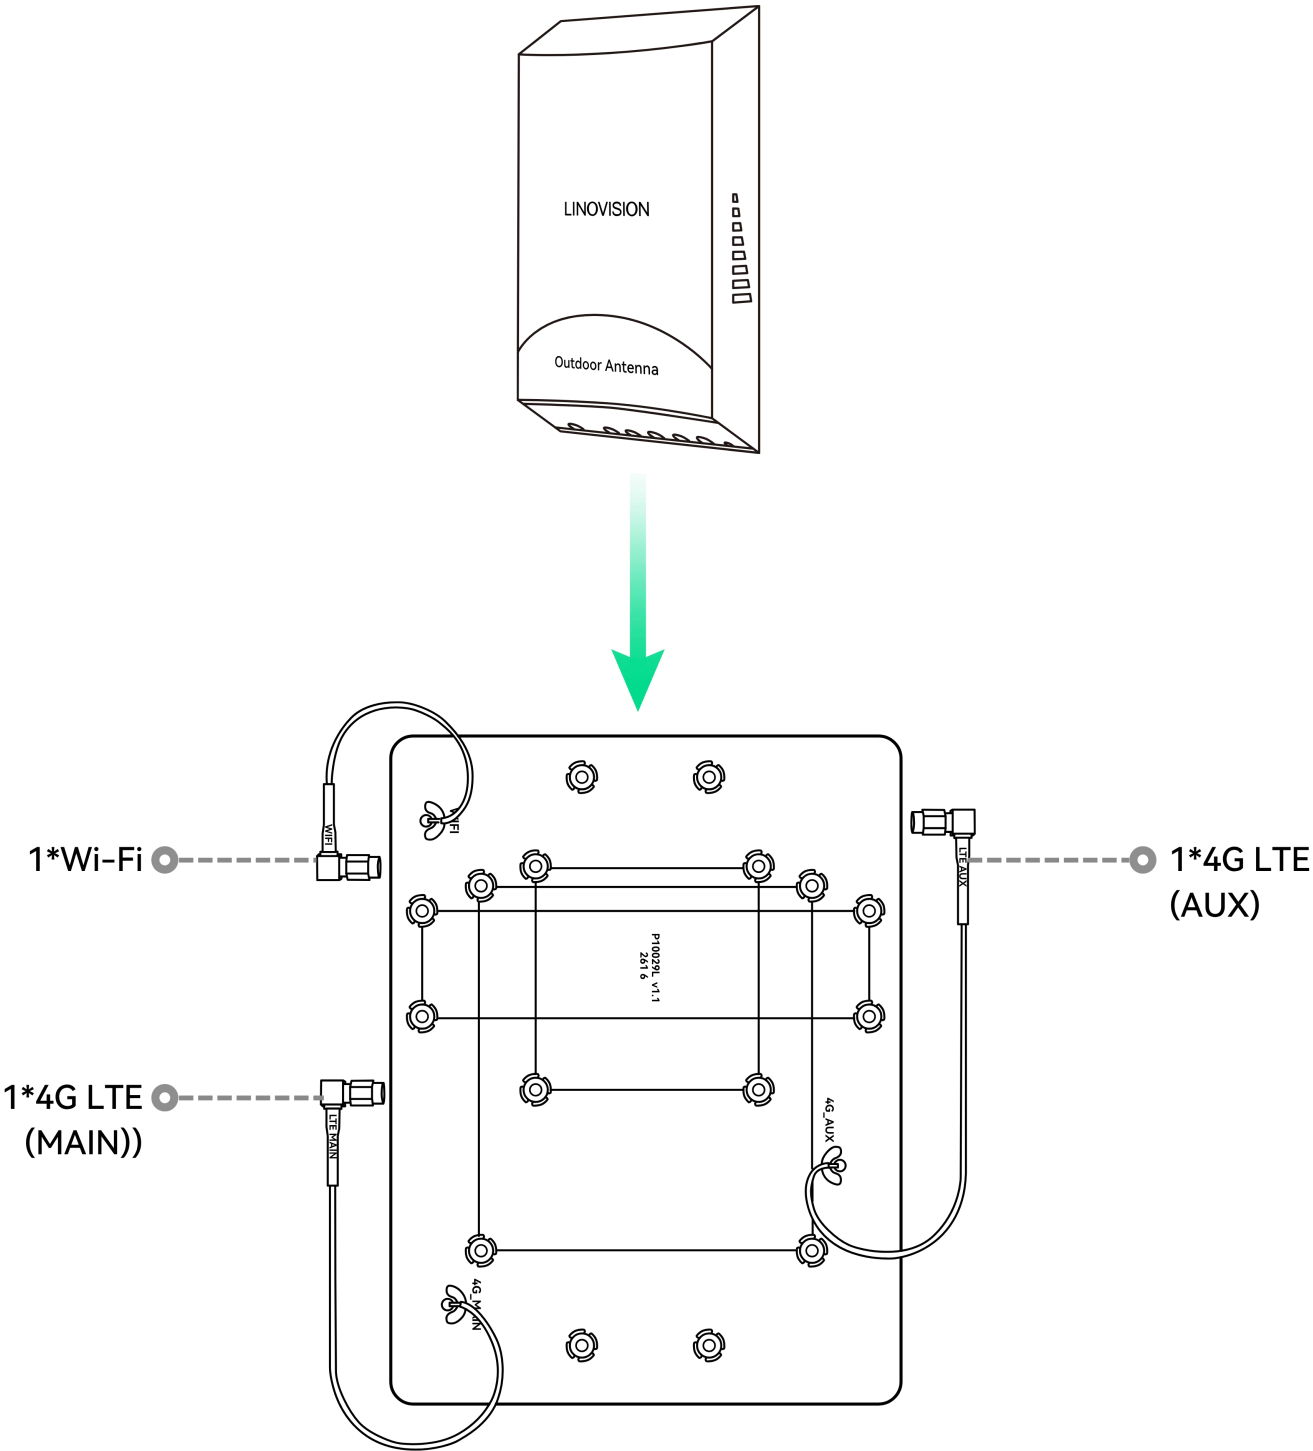


Installation

1.Remove Rear Screws & Release Bottom Cover

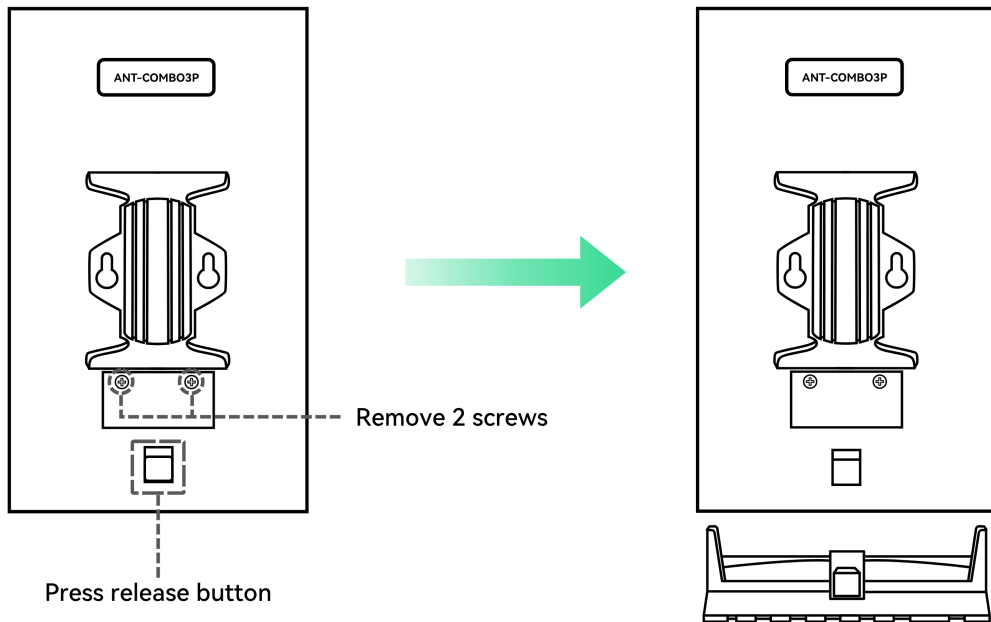


2.Remove the Antenna Board

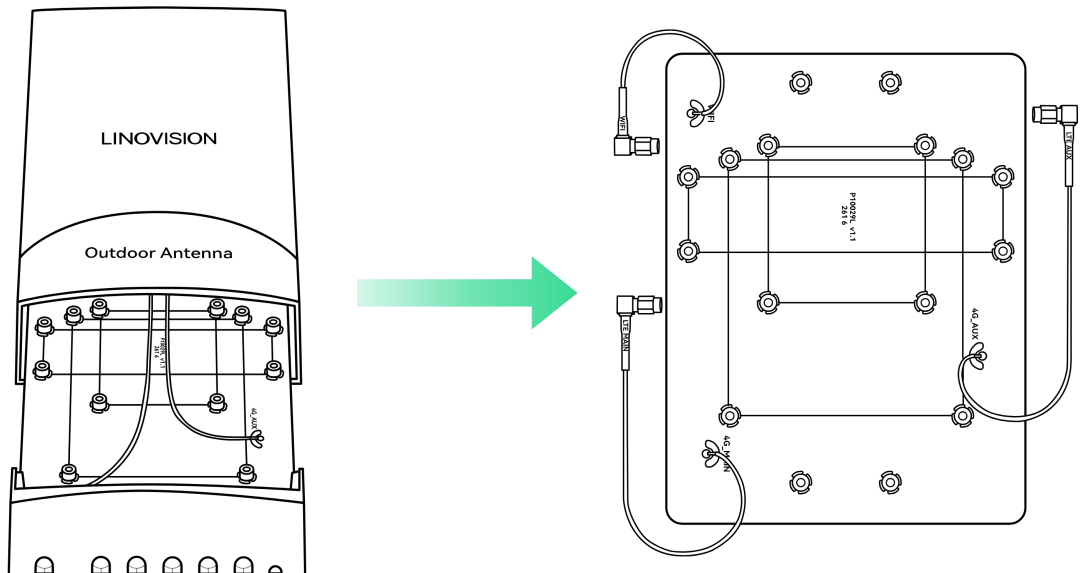


Installation

5.Mount Type

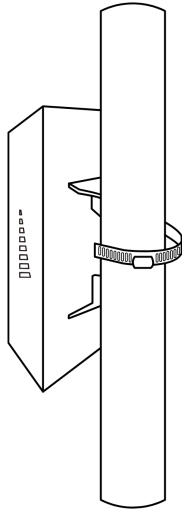


Pole-Mounting

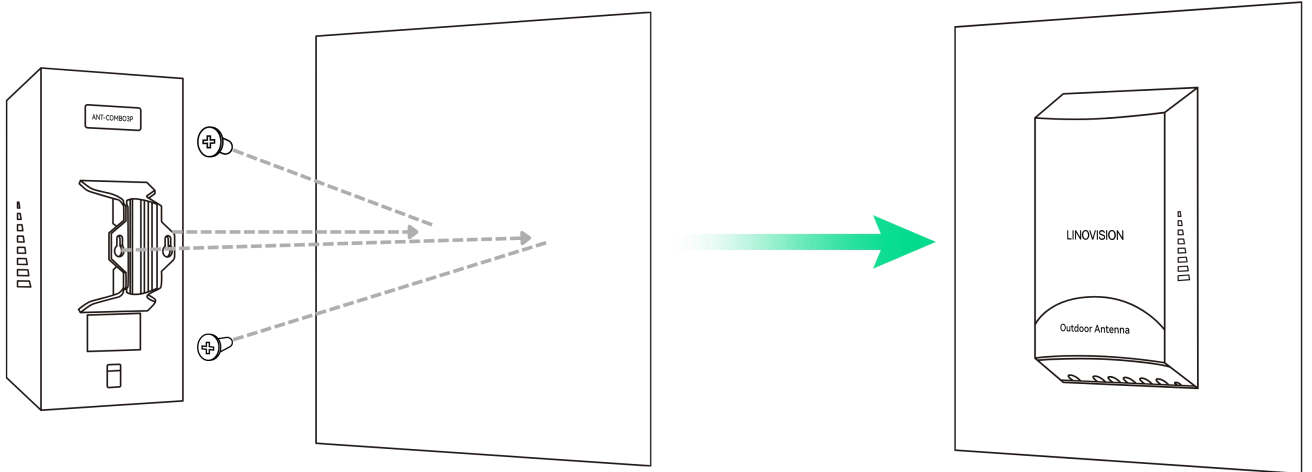


Wall Mounting

Installation


3.Install the Router

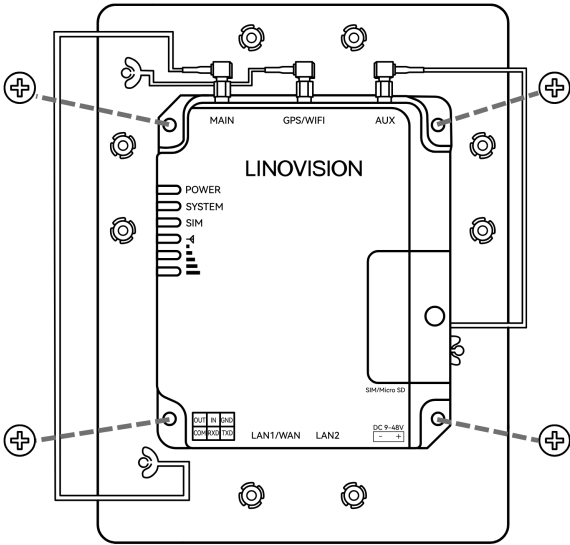

LINOVISION
IOT-R32W

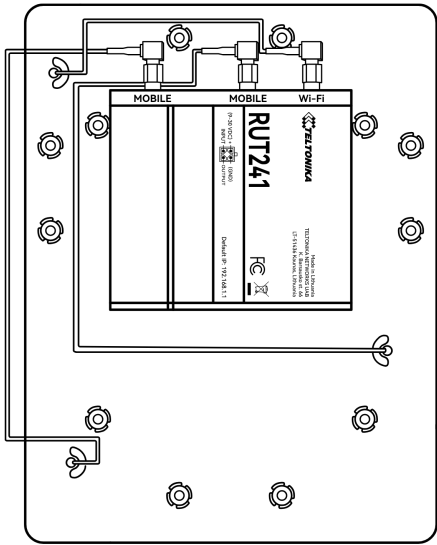


TELTONIKA
RUT241

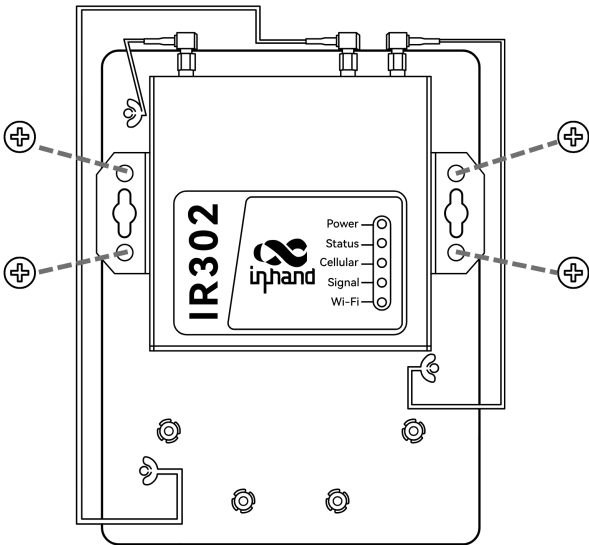

InHand
IR302

4.Install Router Assembly into Enclosure

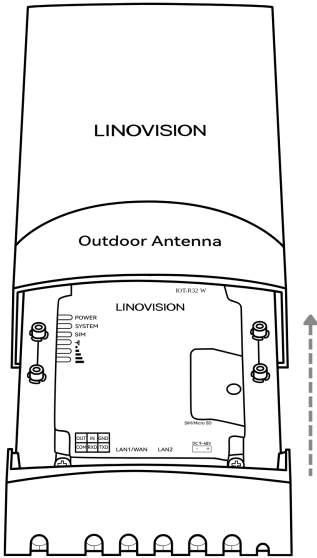

Install From
Bottom

Package Contents




ANT-COMBO3P



Screw Bag



Hoop



User Manual