

POE-SP24V (Pro)

IEEE802.3af/at PoE to Passive 24V PoE Converter



Outstanding Features

Gigabit Passive 24V PoE Converter

- This PoE converter IEEE802.3af/at PoE to Passive 24V PoE output , 20W.
- Supports 10/100/1000Mbps transmission speed. Max 100 meters (330ft) transmission.

PoE Input

- Support IEEE802.3af/at standard.

Easy to Use

- Plug-n-Play, no configuration is required.


Rugged Design

- IP40-rated metal housing to withstand harsh conditions, operating temperatures of -30 to 70°C (-22°F to 158°F) , ESD protection up to ± 2 kV.

Interface




Connection Diagram

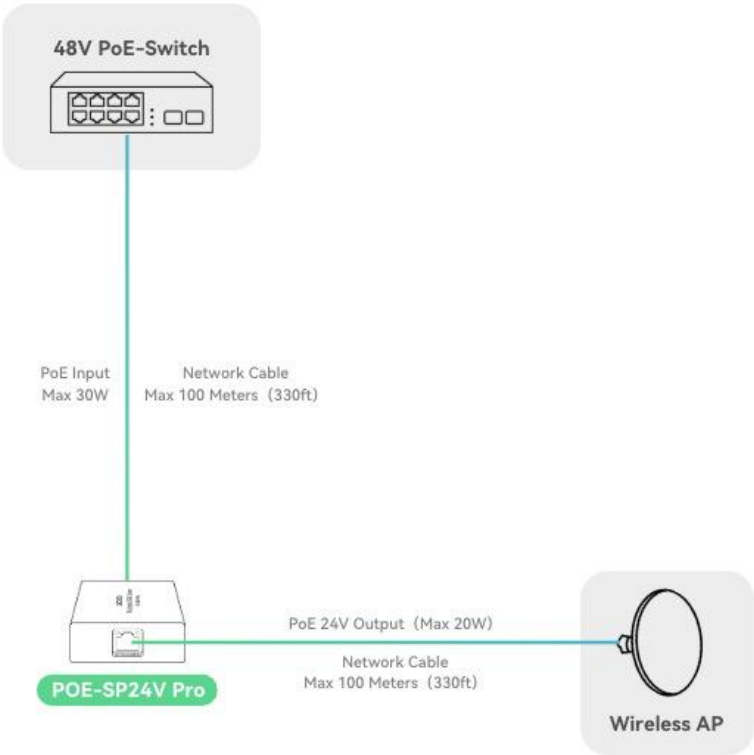

Hardware Specifications

Mechanical Specs	
Dimensions (W*H*D)	60 x 25 x 103 mm (2.36 x 0.984 x 4.06 in)
Weight	0.05 kg (0.11 lb)
Material	Aluminum
Protection Rating	IP40
Interfaces	
PoE Input Port	Ethernet Port: 1 * 10/100/1000Base-T RJ45
PoE Standard	IEEE 802.3af/at
Passive PoE Output Port	Ethernet Port: 1 * 10/100/1000Base-T RJ45
Power Pin Assignment	4/5 (+), 7/8 (-)
Passive PoE Output	24V DC, 0.8A Max
Environment	
Operating Temperature	-30°C to 70°C (-22°F to 158°F)
Operating Humidity	10% to 90% non-condensing
Surge Protection	±2 kV

Dimension

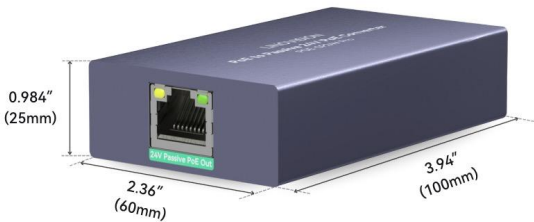

Package Contents



POE-SP24V Pro



Quick Guide